VELSSON
AN INNOVEL COMPANY

avantor ScienceCentral™ | ORDER ON avantorsciences.com

Tailored Workflows

Accelerated Breakthroughs

Reliable & Compliant

Uncompromising Precision

Optimized Value

Partner-Driven Success and Integrity

Phone: 1–800–932–5000

avantor ScienceCentral™ avantorsciences.com

Any prices, product, and/or services details are current when published and subject to change. Offers subject to product availability. Void where prohibited by law or company policy. Any claims concerning products manufactured by third parties are the sole claims of the manufacturer and not those of Avantor or its affiliates. All products are subject to the terms and conditions of sale of Avantor or its affiliates, including the applicable limitations of liability contained therein. The information herein should not be considered a warranty of any kind. Please carefully review any product information sheets and safety information for the product. Trademarks are owned by Avantor, Inc. or its affiliates, unless otherwise noted. | Visit **vwr.com avantorsciences.com** to view our privacy policy and additional disclaimers. © 2025 Avantor, Inc. All rights reserved.

VELSSON
AN INNOVEL COMPANY

avantor ScienceCentral™ | ORDER ON avantorsciences.com

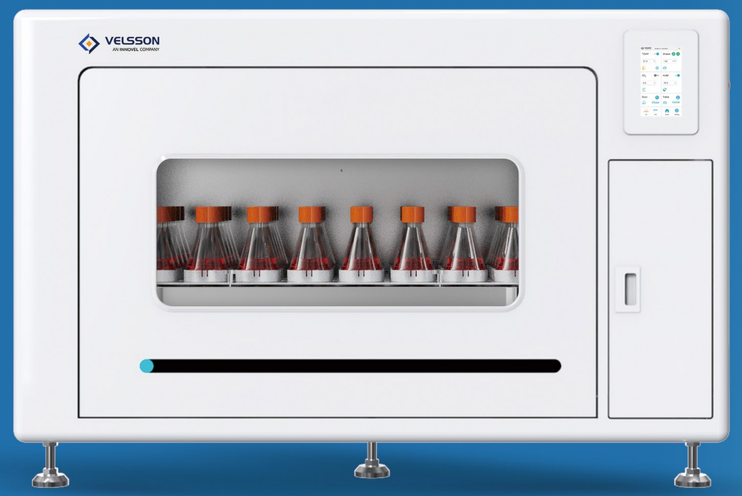

INNOSHAKER™ STAR

Automatic Shaker Incubator

InnoShaker™ Star

Automatic Shaker Incubator

Large scale & Automatic incubation of CHO-S/K1/M, sf9, hek293and many other cell lines.

InnoShaker Star	Remote Monitoring	Shaker	Temperature Range	Humidity	Refrigeration	CO_2	Tri-Gas
500ASWC	•	1-250 rpm	31-37℃	•		•	
500ASC	•	1-250 rpm	31-37℃			•	
500AS	•	1-250 rpm	31-37℃				
500ASFC	•	1-250 rpm	4-37℃		•	•	
500ASWCN	•	1-250 rpm	31-37℃	•		•	•
Custom	•	1-250 rpm	•	•	•	•	•

Dimension (W*H*D)	157*95*103 (cm) / 62*37*41 (inches)
Power Supply	AC220 ~ 50Hz & AC120 ~ 60Hz options
Capacity	Flask: 5L*8, 3L*12, 1L*20, 500mL*30，250mL*48，50mL*150
Speed	1~250RPM (±1RPM)
Shaker Amplitude	26mm/50mm
Temperature	4~37℃(±0.2℃)
Humidity	Up to 90% (±1%)
CO_2	0~20% (±0.1%)
Automatic Control	Outer door & sliding table
Stacking	2
Consumables	Microplate, Tubes & Flasks

Advanced Functions

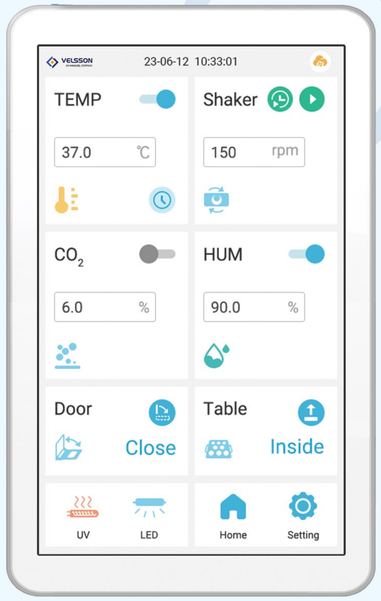

01

Local Touchscreen User Interface

Easy to use touch screen display and user interface

Real-time Alerts

Warning of overheat, overspeed, sensor fault, open door , over humidity and water level.

Data Storage

Extensive event recording and customizable reporting options. Easy data transfer to other software.

02

Remote Monitoring Platform

Remote monitoring platform with intuitive user interface with tablet and PC accessibility for greater oversight.
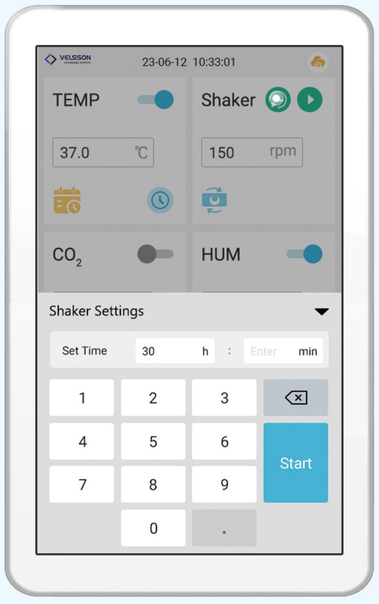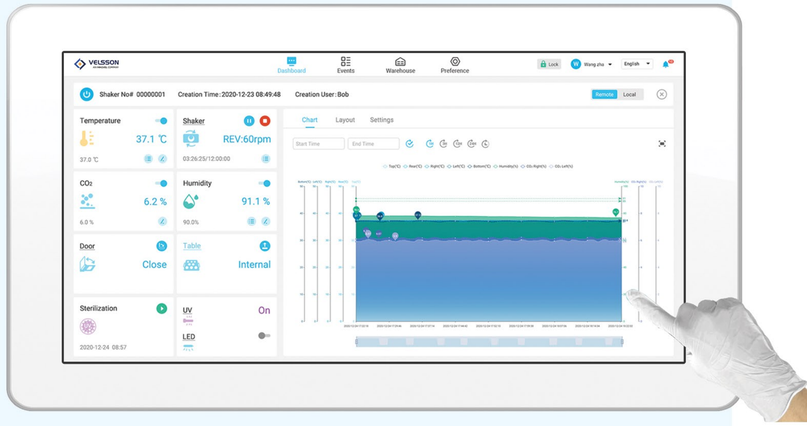
The Platform enables different level of users and permissions for flexibility and provides total remote control capability with alarms, notifications, log query, equipment event history and extensive reporting functions. It provides tracebility and full data storage. The scalable platform can be easily configured as an array to accommodate monitoring of hundreds of incu-bators from one location.